



BLOCK FRAME

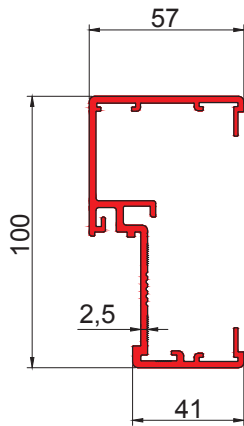


- made of extruded aluminium, non-welded, assembled by corner connectors
- equipped with a rubber gasket, factory-fitted
- equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- resistant to corrosion in humid conditions
- powder coated to any RAL palette colour


→ block aluminium frame
– general view

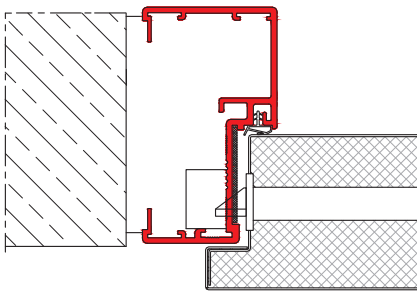


→ block frame
– lock side view

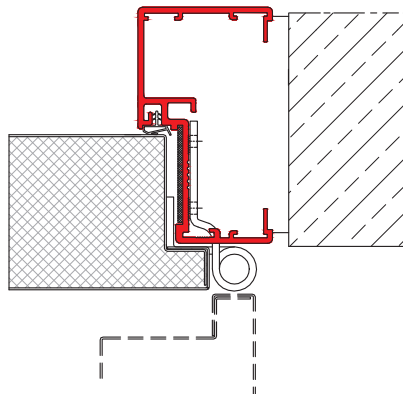

→ block frame
– hinge side view,
standard hinge

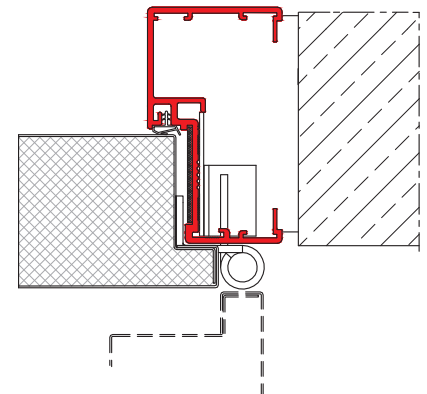


→ block frame
– hinge side view,
3D adjustable hinge

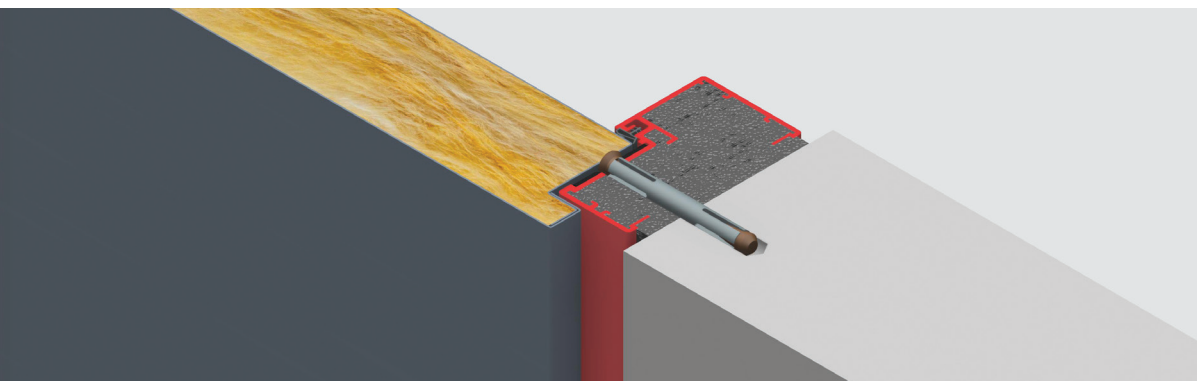

the same model
for doors


DFM DS 00
DFM DS 30
DFM DS 30B
DFM DS 60
DFM OS 00

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

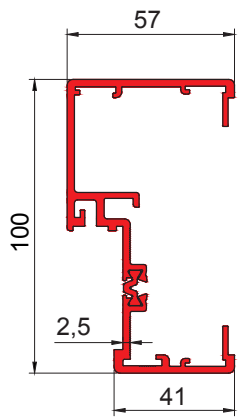


- made of extruded aluminium, non-welded, assembled by corner connectors
- **formed to hold polyamide band- as thermal break**
- equipped with a rubber gasket, factory- fitted
- equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- resistant to corrosion in humid conditions
- powder coated to any RAL palette colour


- block aluminium frame with thermal break – general view

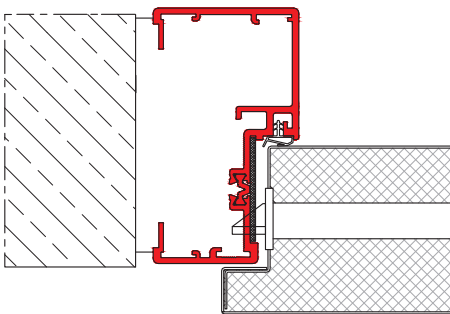


- block frame with thermal break – lock side view

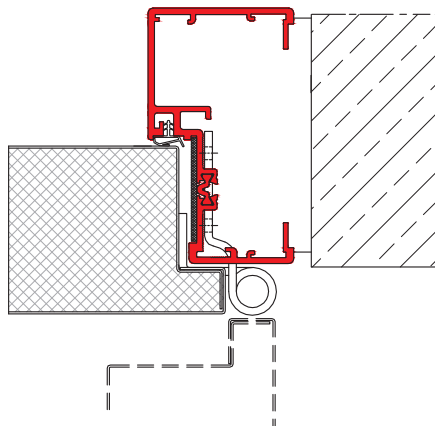

- block frame with thermal break – hinge side view, standard hinge

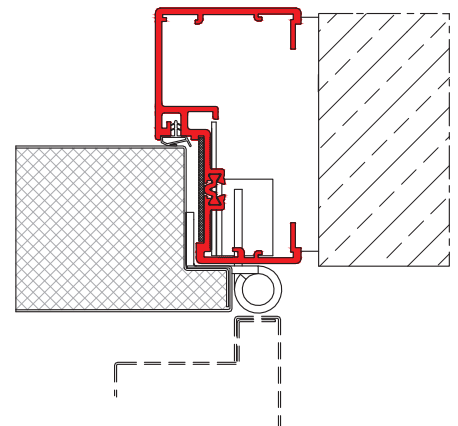


- block frame with thermal break – hinge side view, 3D adjustable hinge

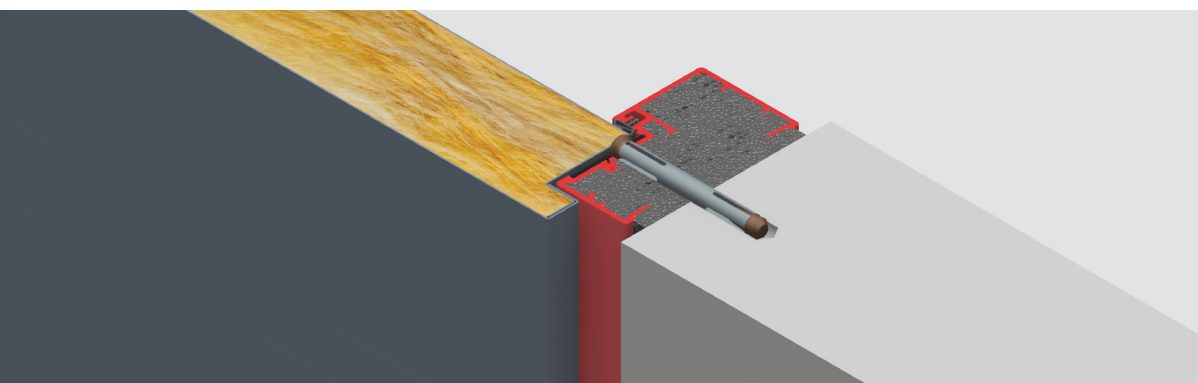

the same model for doors


DFM DS 00
DFM DS 30
DFM DS 30B
DFM DS 60
DFM DS 60B-1
DFM OS 00

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

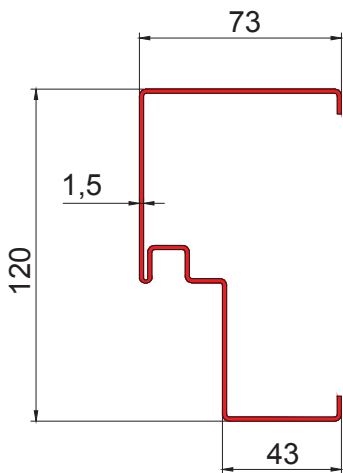


- made of steel, thickness 1.5 mm, welded
- equipped with a rubber gasket, factory- fitted
- equipped with intumescent gasket; installed on site
- resistant to corrosion in humid conditions
- powder coated to any RAL palette colour


→ block steel frame
- general view

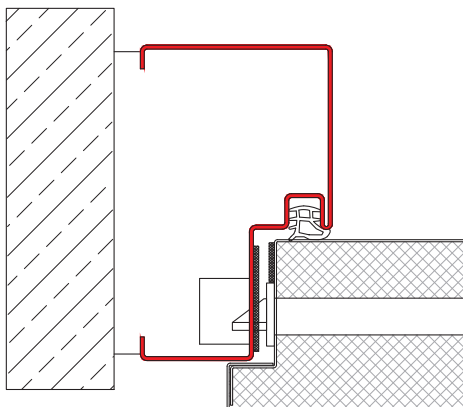

→ block steel frame
- lock side view

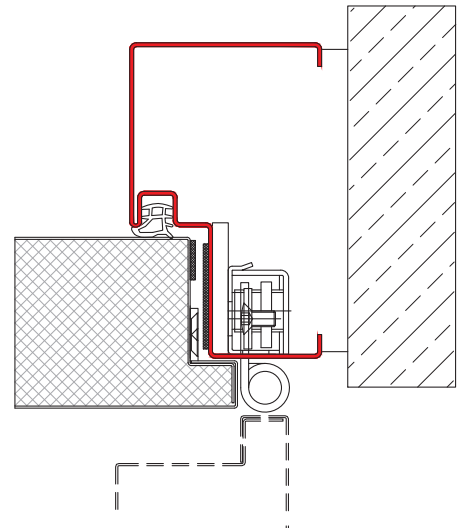


→ block steel frame
- hinge side view, 3D adjustable hinge

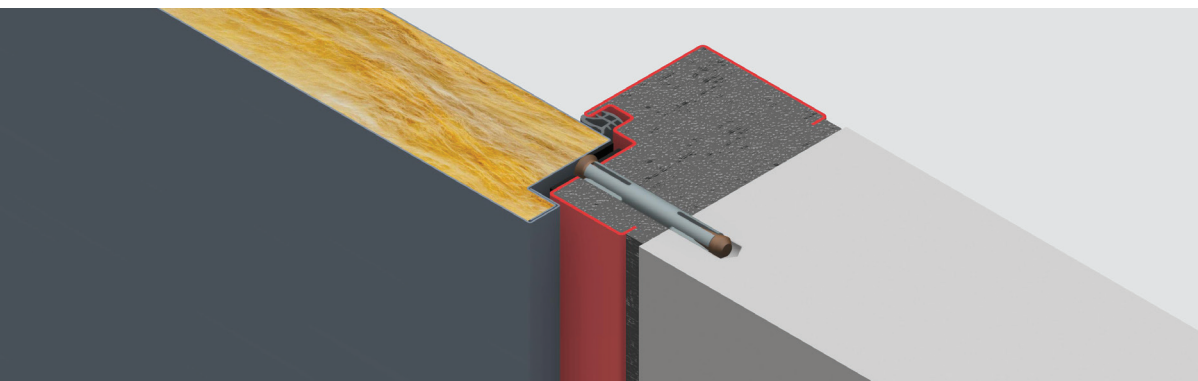

the same model
for fire doors
DFM DS 120
DFM OS 60


NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

BLOCK FRAME with hidden rebate (HP)




- made of extruded aluminium, non-welded, assembled by corner connectors
- **shaped to hide door leaf rebate**
- equipped with a rubber gasket, factory- fitted
- equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- resistant to corrosion in humid conditions
- powder coated to any RAL palette colour


→ block aluminium frame for doors with hidden rebate – general view

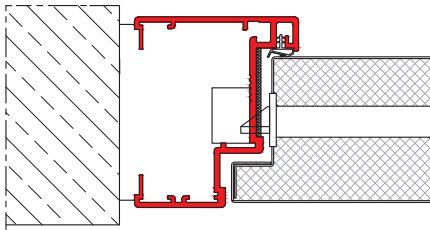


→ block frame for doors with hidden rebate – lock side view

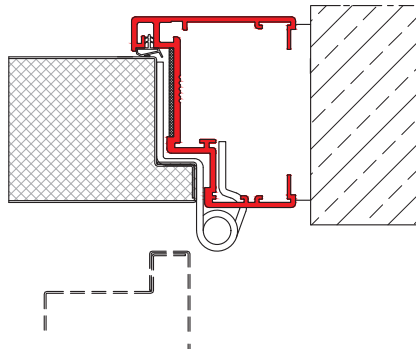

→ block frame for doors with hidden rebate – hinge side view, standard hinge

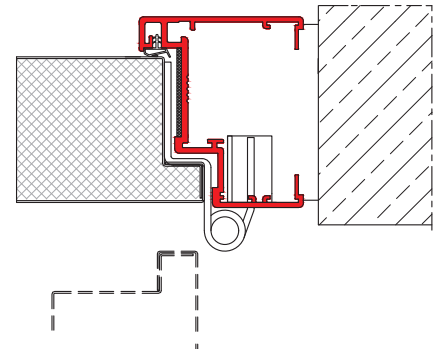

→ block frame for doors with hidden rebate – hinge side view, 3D adjustable hinge

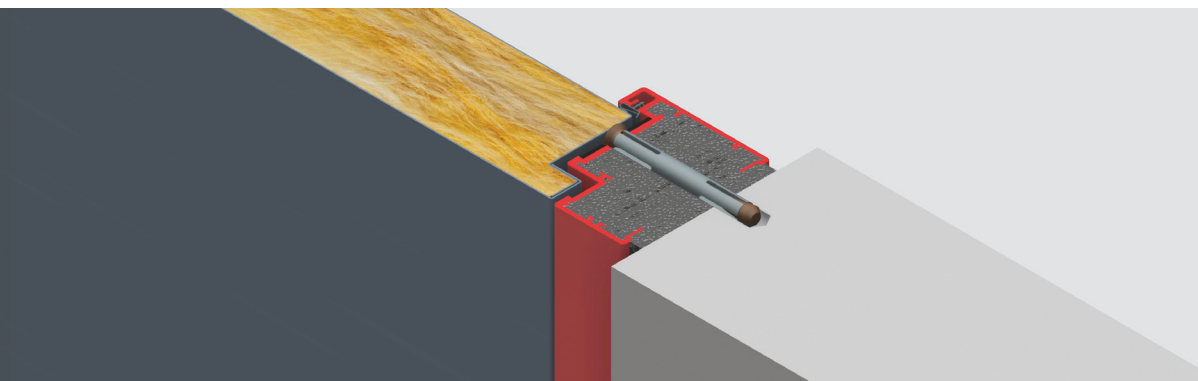


the same model for doors

DFM DS HP 00
DFM DS HP 30
DFM DS HP 30B
DFM DS HP 60
DFM OS HP 00


NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

HYBRID FRAME (60N)

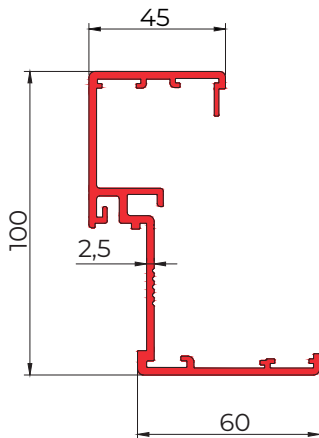


- made of extruded aluminium, non-welded, assembled by corner connectors
- equipped with a rubber gasket, factory-fitted
- equipped with intumescent gasket for fire doors or EPDM gasket for non-fire doors; installed on site
- resistant to corrosion in humid conditions
- powder coated to any RAL palette colour
- door frame 60N assures wall finish around corner without necessity of cut-outs for hinges or lock box


→ hybrid aluminium frame
– general view

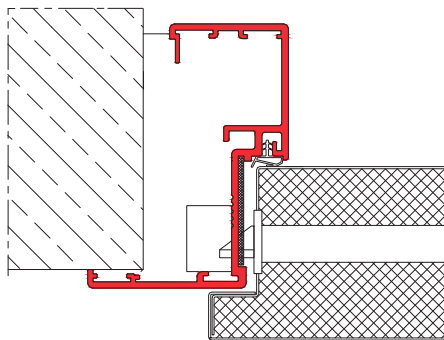

→ hybrid frame
– lock side view

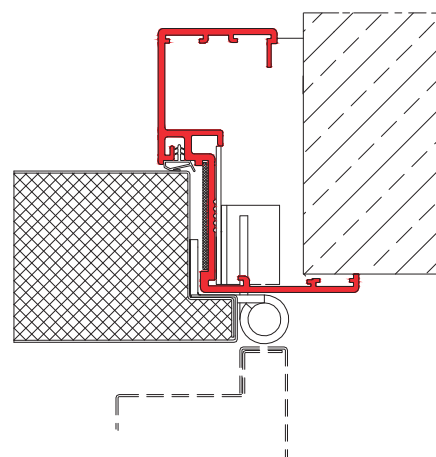

→ hybrid frame
– hinge side view,
3D adjustable hinge

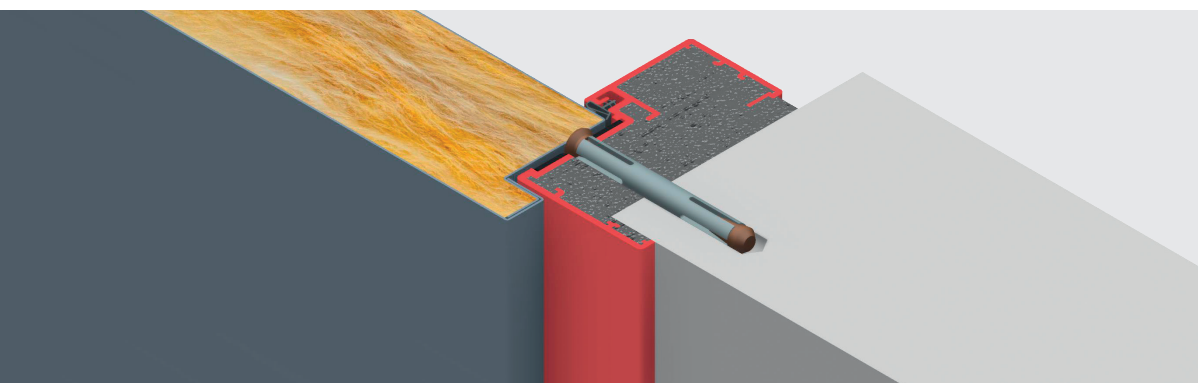

the same model
for doors

DFM DS 00

DFM DS 30


DFM DS 60

DFM DS 30B

DFM DS 60B-1


NOTE! Door frame and installation gap to be duly filled, in accordance with certificate

HYBRID FRAME (60N)

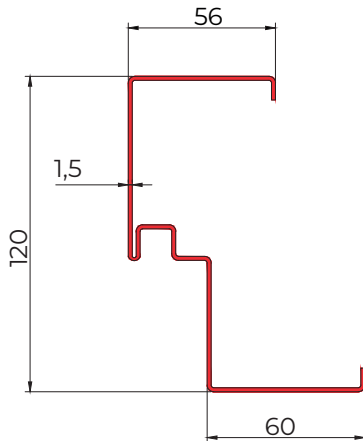


- made of steel, thickness 1.5 mm, welded
- equipped with a rubber gasket, factory- fitted
- equipped with intumescent gasket; installed on site
- resistant to corrosion in humid conditions
- powder coated to any RAL palette colour
- door frame 60N assures wall finish around corner without necessity of cut-outs for hinges or lock box


→ hybrid aluminium frame
– general view

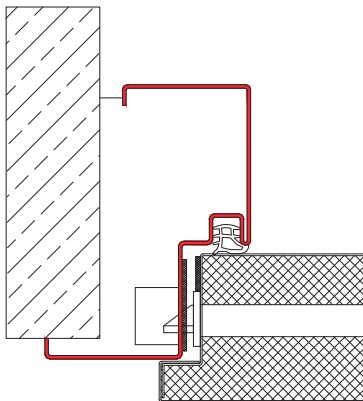

→ hybrid frame
– lock side view

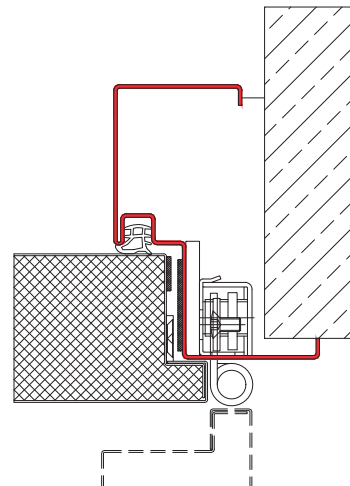

→ hybrid frame
– hinge side view,
3D adjustable hinge

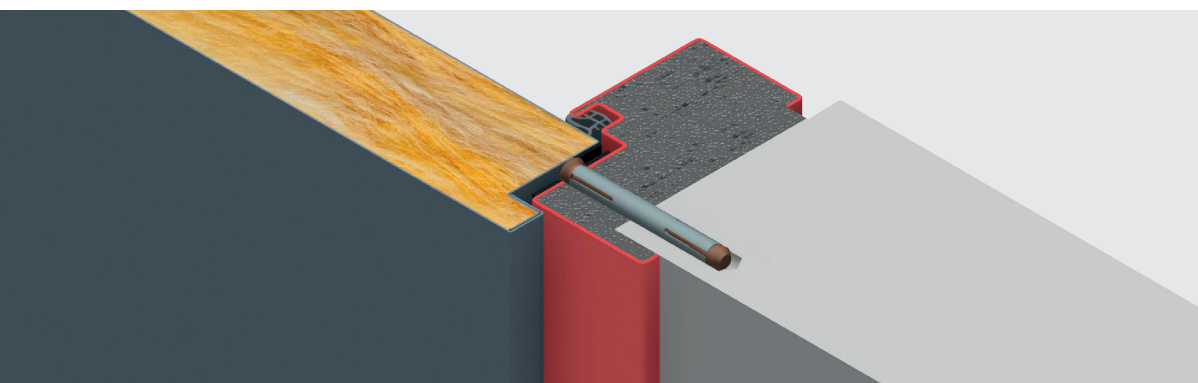

the same model
for doors
DFM DS 120S

NOTE! Door frame and installation gap to be duly filled, in accordance with certificate